
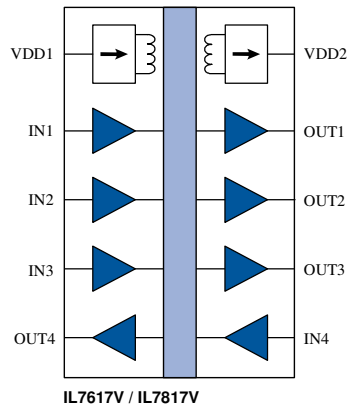
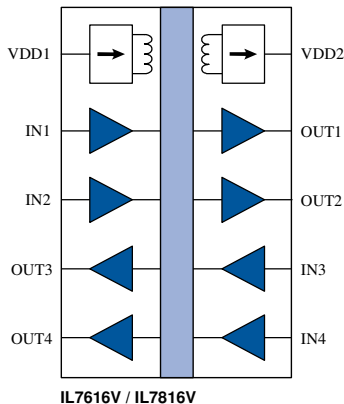
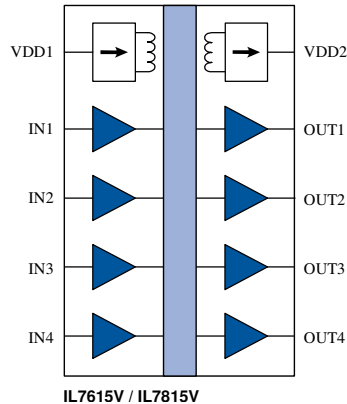




High-Speed Data Couplers with Integrated DC-to-DC Convertors

Block Diagrams



Features

- 110 Mbps
- Integrated 3.3-to-3.3 V or 3.3-to-5 V DC-DC convertors
- Ultralow output ripple
- -40 °C to 125 °C temperature range
- Overcurrent and thermal shutdown protection
- EN 55032 CISPR 32 Class B compliant
- 4 kV_{RMS} isolation
- UL 1577 approved
- EU Declaration of Conformity (CE mark)
- 0.3" True 8™ mm 16-pin SOIC JEDEC-standard package

Applications

- Industrial automation
- "2x MOPP" medical instrumentation
- Grid infrastructure
- Test and measurement
- Three-wire SPI
- Isolated ADCs and DACs

Description

The IL761x- and IL781x-Series are high-speed, fully-isolated, data couplers with integrated, one-quarter watt DC-to-DC convertors. This level of integration dramatically reduces chip count and board area.

The IL761xV-Series has 3.3-to-3.3 V DC-to-DC convertors, and the IL781xV-Series has 3.3-to-5 V DC-to-DC convertors.

The devices use NVE's proven, patented* spintronic Giant Magnetoresistance (GMR) isolation technology and IsoLoop® high-efficiency micro-scale isolation transformers.

Internal shielding and DC-to-DC convertor frequency hopping minimize EMI. Parts are EN 55032 CISPR 32 Class B compliant with just a small amount of stitching capacitance.

A unique ceramic/polymer composite barrier provides best-in-class isolation and virtually unlimited barrier life.



IsoLoop® is a registered trademark of NVE Corporation.
*U.S. Patent number 5,831,426; 6,300,617 and others.

Rev. E

Absolute Maximum Ratings⁽¹⁾


Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Storage temperature	T _S	-55		150	°C	
Junction temperature	T _J	-55		150	°C	
Supply voltage	V _{DD1}	-0.5		6	V	
Digital input voltage		-0.5		V _{DD} + 0.5	V	
Digital output voltage		-0.5		V _{DD} + 1	V	
Coupler output current drive	I _O			10	mA	
Lead solder temperature				260	°C	10 sec.
ESD			2		kV	HBM

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Input-side supply voltage	V _{DD1}	3	3.3	3.6	V	
Isolated-side power supply input	V _{DD2B}	2.7	3.3	5.5	V	
Ambient operating temperature	T _{min} ; T _{max}	-40		125	°C	
Junction temperature	T _J	-40		150	°C	
High-level digital input voltage	V _{IH}	2.4		V _{DD1}	V	V _{DD1} = 3.3 V
Low-level digital input voltage	V _{IL}	0		0.8	V	


IL7611V / IL7811V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
3	IN ₁	Data in, channel 1
4	IN ₂	Data in, channel 2
5	NC	No internal connection
6	NC	No internal connection
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	V _{DD2A}	Isolated DC-DC convertor output
12	NC	No internal connection
13	OUT ₂	Data out, channel 1
14	OUT ₁	Data out, channel 2
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
16	V _{DD2B}	Isolated-side power supply input (connect to pin 11 and bypass with 10 μ F for normal operation).

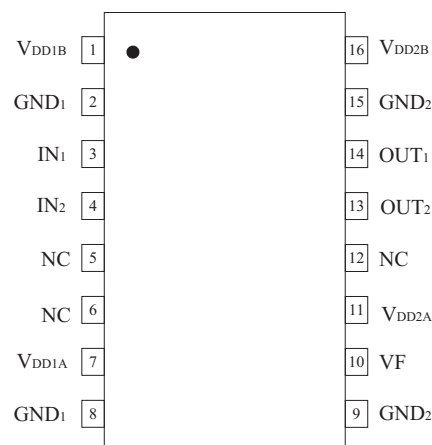


IL7612V / IL7812V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
3	IN ₁	Data in, channel 1
4	OUT ₂	Data out, channel 2
5	NC	No internal connection
6	NC	No internal connection
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	V _{DD2A}	Isolated DC-DC convertor output
12	NC	No internal connection
13	IN ₂	Data out, channel 1
14	OUT ₁	Data in, channel 2
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
16	V _{DD2B}	Isolated-side power supply input (connect to pin 11 and bypass with 10 μ F for normal operation).

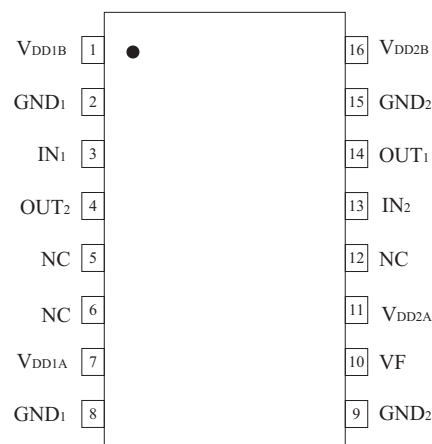


IL7614V / IL7814V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected)
3	OUT ₁	Data out, channel 1
4	$\overline{\text{OE}}_1$	Channel 1 output enable (if high, OUT ₁ = high impedance; has a 500 k Ω nominal internal pulldown)
5	IN ₂	Data in, channel 2
6	IN ₃	Data in, channel 3
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected)
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected)
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	OUT ₃	Data out, channel 3
12	OUT ₂	Data out, channel 2
13	$\overline{\text{OE}}_{2-3}$	Channel 2 and 3 output enable (if high, OUT ₂ and OUT ₃ are high impedance; has a 500 k Ω nominal internal pulldown)
14	IN ₁	Data in, channel 1
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected)
16	V _{DD2}	Isolated supply voltage (bypass with 10 μ F).

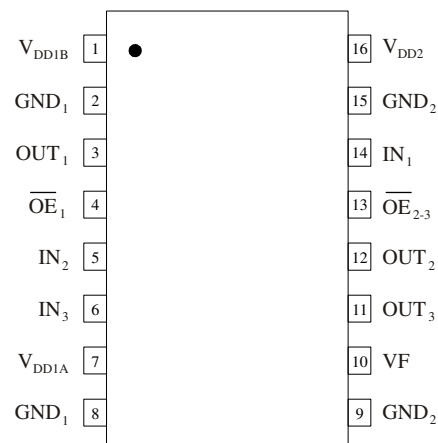


IL7615V / IL7815V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
3	IN ₁	Data in, channel 1
4	IN ₂	Data in, channel 2
5	IN ₃	Data in, channel 3
6	IN ₄	Data in, channel 4
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	OUT ₄	Data out, channel 4
12	OUT ₃	Data out, channel 3
13	OUT ₂	Data out, channel 2
14	OUT ₁	Data out, channel 1
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
16	V _{DD2}	Isolated supply voltage (bypass with 10 μ F).

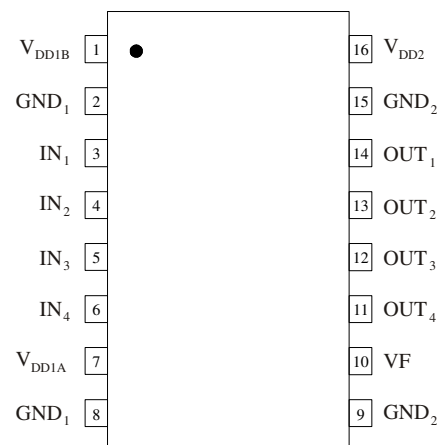


IL7616V / IL7816V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
3	IN ₁	Data in, channel 1
4	IN ₂	Data in, channel 2
5	OUT ₃	Data out, channel 4
6	OUT ₄	Data out, channel 4
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	IN ₄	Data in, channel 4
12	IN ₃	Data in, channel 3
13	OUT ₂	Data out, channel 2
14	OUT ₁	Data out, channel 1
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
16	V _{DD2}	Isolated supply voltage (bypass with 10 μ F).

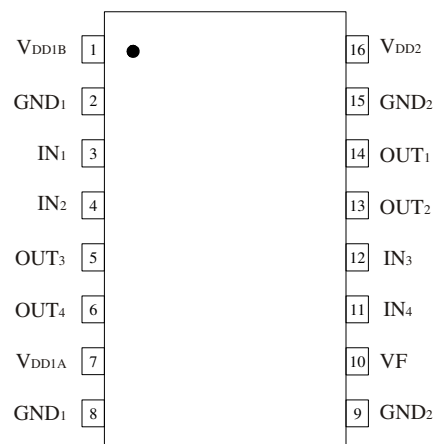

IL7617V / IL7817V Pin Connections

1	V _{DD1B}	Coupler controller-side power supply input (3.3 V nominal).
2	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
3	IN ₁	Data in, channel 1
4	IN ₂	Data in, channel 2
5	IN ₃	Data in, channel 3
6	OUT ₄	Data out, channel 4
7	V _{DD1A}	DC-DC convertor input voltage (3.3 V nominal); bypass with 0.1 μ F.
8	GND ₁	Ground return for V _{DD1} (pins 2 and 8 internally connected).
9	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
10	VF	Output-side rectifier output / regulator input; connect to a 0.1 μ F/16 V external filter capacitor.
11	IN ₄	Data in, channel 4
12	OUT ₃	Data out, channel 3
13	OUT ₂	Data out, channel 2
14	OUT ₁	Data out, channel 1
15	GND ₂	Ground return for V _{DD2} (pins 9 and 15 internally connected).
16	V _{DD2}	Isolated supply voltage (bypass with 10 μ F)

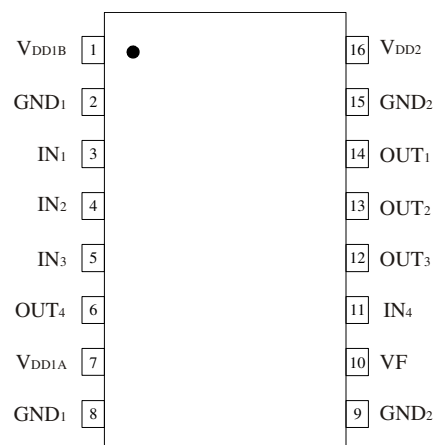

Coupler Specifications ($V_{DD1B} = 3.3\text{ V}$; T_{min} to T_{max} unless otherwise stated)

Electrical Specifications						
Parameters	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Controller-side coupler quiescent supply current						
IL7611V / IL7811V	I _{DD1B}		0.01	0.015	mA	
IL7612V / IL7812V			1.2	1.75		
IL7614V / IL7814V			1.2	1.75		
IL7615V / IL7815V			0.3	0.4		
IL7616V / IL7816V			2.4	3.5		
IL7617V / IL7817V			1.2	1.75		
Isolated-side quiescent supply current						
IL7611V / IL7811V	I _{DD2}		2.4	3.5	mA	
IL7612V / IL7812V			1.2	1.75		
IL7614V / IL7814V			2.4	3.5		
IL7615V / IL7815V			4.8	7		
IL7616V / IL7816V			2.4	3.5		
IL7617V / IL7817V			3.6	5.25		
Controller-side dynamic supply current						
IL7611V / IL7811V	I _{DD1B}		0.3	0.5	mA/Mbps	All channels switching
IL7612V / IL7812V			0.15	0.25		
IL7614V / IL7814V			0.3	0.5		
IL7615V / IL7815V			0.6	1		
IL7616V / IL7816V			0.3	0.5		
IL7617V / IL7817V			0.45	0.75		
Isolated-side dynamic supply current						
IL7611V / IL7811V	I _{DD2}		0.02	0.04	mA/Mbps	All channels switching
IL7612V / IL7812V			0.15	0.25		
IL7614V / IL7814V			0.15	0.25		
IL7615V / IL7815V			0.02	0.04		
IL7616V / IL7816V			0.3	0.5		
IL7617V / IL7817V			0.15	0.25		
Logic input current	I _I	−10		10	μA	
Logic high output voltage	V _{OH}	V _{DD} − 0.1	V _{DD}		V	I _O = −20 μA, V _I = V _{IH}
		0.8 x V _{DD}	0.9 x V _{DD}			I _O = −4 mA, V _I = V _{IH}
Logic low output voltage	V _{OL}		0	0.1	V	I _O = 20 μA, V _I = V _{IL}
			0.5	0.8		I _O = 4 mA, V _I = V _{IL}

Coupler Switching Specifications						
Maximum data rate		100	110		Mbps	C _L = 15 pF
Pulse width ⁽⁶⁾	PW	10			ns	50% Points, V _O
Propagation delay input to output (high to low)	t _{PHL}		12	18	ns	C _L = 15 pF
Propagation delay input to output (low to high)	t _{PLH}		12	18	ns	C _L = 15 pF
Pulse width distortion ⁽²⁾	PWD		2	3	ns	C _L = 15 pF
Propagation Delay difference between any two parts ⁽³⁾	t _{PSK}		4	6	ns	C _L = 15 pF
Output rise time (10%–90%)	t _R		2	4	ns	C _L = 15 pF
Output fall time (10%–90%)	t _F		2	4	ns	C _L = 15 pF
Common mode transient immunity (output logic high or logic low) ⁽⁴⁾	CM _H , CM _L	30	50		kV/μs	V _{CM} = 1500 V _{DC} t _{TRANSIENT} = 25 ns
Channel-to-channel skew	t _{CSK}		2	3	ns	C _L = 15 pF

Coupler Magnetic Field Immunity ⁽⁷⁾						
Power frequency magnetic immunity	H _{PF}	1000	1500		A/m	50Hz/60Hz
Pulse magnetic field immunity	H _{PM}	1800	2000		A/m	t _p = 8μs
Damped oscillatory magnetic field	H _{OSC}	1800	2000		A/m	0.1Hz – 1MHz
Cross-axis immunity multiplier ⁽⁸⁾	K _X		2.5			

DC-DC Converter Specifications

T _{min} to T _{max} and V _{DD1} = 3.0 V to 3.6 V unless otherwise stated						
Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Output voltage IL761xV IL781xV	V _{DD2A}	2.7	3.3	3.45	V	I _{DD2A} < 80 mA
		4.5	5	5.5		I _{DD2A} < 50 mA
Output current (total available to internal transceiver and external load) IL761xV IL781xV	I _{DD2A}				mA	
		80 50				
Overcurrent threshold	I _{DD2A}		150		mA	Disable
			145			Re-enable
Short-circuit protection limited current		115	125	135	mA	
Controller-side quiescent supply current	I _{DD1AQ}		200	240	mA	No external load on V _{DD2}
Controller-side supply current	I _{DD1A}		380	440	mA	Maximum DC-DC converter load
Line regulation	$\Delta V_{DD2}/\Delta V_{DD1A}$		32	40	mV/V	25 °C
			16			125 °C
Load regulation	$\Delta V_{DD2}/V_{DD2}$		5	6	%	I _{DD2} = 0 to max.
Output voltage temperature coefficient	$(\Delta V_{DD2}/V_{DD2}) / \Delta T$		0.017 0.03		%/C	I _{DD2} = 10 mA
						I _{DD2} = 50 mA
Capacitive load	C _{DD2}			1000	μF	
Output voltage ripple	V _{DD2-RIPPLE}			5	mV _{P-P}	20 MHz bandwidth; I _{DD2} = max.
			1			1 kHz bandwidth; I _{DD2} = max.
Start-up time	t _{SU}	2			ms	I _{DD2} = 0
				6		I _{DD2} = max.
Converter frequency	f _{OSC}	105	113	120	MHz	

Isolation Specifications

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Isolation voltage*	V _{ISO}	4000			V _{RMS}	Per VDE 0884-17
Working Voltage	V _{IORM}	600			V _{RMS}	
Transient overvoltage	V _{IOTM}	6000			V _{PK}	
Surge immunity		6400			V _{PK}	
Creepage distance (external)		8.03	8.3		mm	Per IEC 60601
Total barrier thickness (internal)		0.012	0.016		mm	
Barrier resistance	R _{IO}		>10 ¹⁴		Ω	500 V _{RMS}
Barrier capacitance	C _{IO}		7		pF	f = 1 MHz
Leakage current			0.2		μA _{RMS}	240 V _{RMS} , 60 Hz
Comparative tracking index	CTI	≥600			V _{RMS}	Per IEC 60112
Barrier life			44000		Years	100°C, 1000 V _{RMS} , 60% CL activation energy

* VDE 0884-17 Basic Isolation certified under VDE File Number 5016933-4880-0001.

UL 1577 approved under Component Recognition Program File Number E207481.

Parts 100% tested at 4.8 kV_{RMS} (6.79 kV_{PK}) for 1 second, 5 pC partial discharge limit under the stringent IEC60747-17 standard.

Each lot sample tested at 4 kV_{RMS} (5.66 kV_{PK}) for 1 minute.

- 2 x MOPP compliant under IEC 60601-1 for medical systems (isolation voltage ≥4 kV_{RMS}; creepage ≥8 mm).
- Compliant with IEC 60950-1 and IEC 62368-1 end equipment standards.

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Junction–ambient thermal resistance	θ _{JA}		67		°C/W	Double-sided PCB with thermal vias in free air
Junction–case (top) thermal resistance	θ _{JC}		12			
Junction–ambient thermal resistance	θ _{JA}		46			2s2p PCB with thermal vias per JESD51 with thermal vias in free air
Junction–case (top) thermal resistance	θ _{JC}		9			
Power dissipation	P _D			1.6	W	

Notes:

1. Absolute Maximum specifications mean the device will not be damaged if operated under these conditions. It does not guarantee performance.
2. PWD is defined as $t_{PHL} - t_{PLH}$. %PWD is equal to PWD divided by pulse width.
3. t_{PSK} is the magnitude of the worst-case difference in t_{PHL} and/or t_{PLH} between devices at 25 °C.
4. CM_H is the maximum common mode voltage slew rate that can be sustained while maintaining $V_o > 0.8 V_{DD2}$. CM_L is the maximum common mode input voltage that can be sustained while maintaining $V_o < 0.8 V$. The common mode voltage slew rates apply to both rising and falling common mode voltage edges.
5. Device is considered a two-terminal device: pins 1–8 shorted and pins 9–16 shorted.
6. Minimum pulse width is the minimum value at which specified PWD is guaranteed.
7. The relevant test and measurement methods are given in the Electromagnetic Compatibility section.
8. External magnetic field immunity is improved by this factor if the field direction is “end-to-end” rather than to “pin-to-pin” (see diagram in the Electromagnetic Compatibility section).

Device Operation

DC-DC Converter Operation

The DC-DC converter block diagram is shown in Figure 1:

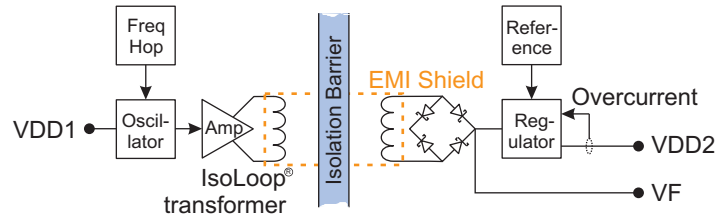


Figure 1. DC-DC converter block diagram.

A 113 MHz oscillator drives a high-frequency power amplifier, which in turn drives an IsoLoop[®] microtransformer primary. Frequency hopping reduces EMI peak amplitudes, and embedded magnetic shielding further reduces radiated EMI.

A unique ceramic/polymer composite barrier provides best-in-class 5 kV isolation with virtually unlimited barrier life.

On the other side of the isolation barrier, the transformer secondary output is filtered, rectified, and regulated by a low-EMI low drop-out regulator with a precision bandgap voltage reference.

Simple Capacitive Decoupling

The only external parts required are a 0.1 μF capacitor placed as close as possible to the V_{DD1B} supply pin, a 10 μF ceramic capacitor for the V_{DD2} pin, and a 0.1 $\mu\text{F}/16\text{ V}$ filter capacitor near the V_F pin. The low external parts count reduces board area and cost.

Soft Start-up

The two millisecond minimum startup time of allows control electronics stabilize before powering isolated-side electronics.

Short-Circuit Protection

The output current is internally limited to approximately 125 mA. This provides short-circuit protection and eliminates the need for external protection circuitry.

Optional External Regulation

An external regulator can be used in place of the parts' internal low drop-out regulator for voltages up to approximately 8 volts. The maximum output current decreases at higher regulator output voltages, but the output power capacity remains approximately 250 milliwatts.

GMR Isolator Operation

An equivalent circuit for each of the Giant Magnetoresistor (GMR) isolator channels is shown in Figure 2:

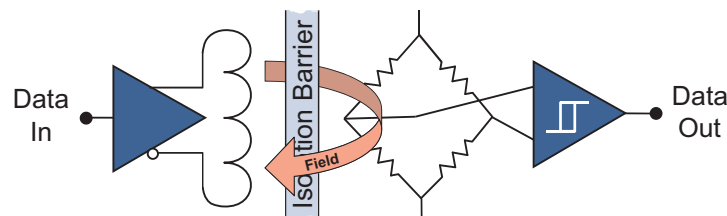


Figure 2. Isolator model signal path.

The GMR isolator signal path starts with a buffered input signal that is driven through an ultraminiature coil. This generates a small magnetic field that changes the electron spin polarization of GMR resistors, which are configured as a Wheatstone bridge. The change in spin polarization of the resistors creates a bridge voltage which drives an output comparator to construct an isolated version of the input signal. GMR is inherently high speed and low distortion.

Dynamic Power Consumption

NVE Isolators achieve their low power consumption from the way they transmit data across the isolation barrier. By detecting the edge transitions of the input logic signal and converting these to narrow current pulses, a magnetic field is created around the GMR Wheatstone bridge. Depending on the direction of the magnetic field, the bridge causes the output comparator to switch following the input logic signal. Since the current pulses are narrow, about 2.5 ns, the power consumption is independent of mark-to-space ratio and solely dependent on frequency. This has obvious advantages over optocouplers, which have power consumption heavily dependent on mark-to-space ratio.

Power consumption increases with frequency for the input side of each channel, but output-side power consumption is constant for a particular isolator channel. For channels with inputs on the V_{DD2} side, the dynamic power consumption must be provided by the DC-DC convertor, so V_{DD1B} supply current increases with the frequency of that channel.

Coupler Status on Start-up and Shut Down

To minimize power dissipation, coupler input signals are differentiated and then latched on the output side of the isolation barrier to reconstruct the signal. This could result in an ambiguous output state depending on power up, shutdown and power loss sequencing. Therefore, the designer should consider including an initialization signal in the start-up circuit. Initialization consists of toggling the input either high then low, or low then high.

Current Drawn from the Output of the DC-DC Convertor by the Coupler Section

The current drawn from the output of the DC-to-DC convertor by the coupler section consists of the coupler's isolated-side quiescent current, plus, in the case of the IL7614V, isolated-side dynamic current. So, for example, for an IL7614V, the isolated-side quiescent current is 3.5 mA, the dynamic current is 0.24 mA/Mbps, so if the coupler is running at 100 Mbps, the dynamic current is 24 mA and the total current is 27.5 mA. Since the DC-DC convertor can supply up to 80 mA, the IL7614 can therefore supply up to 52.5 mA to external loads. Of course, the DC-DC convertor can supply more if the coupler channels are running below full speed.

Overall Operation

EMI Mitigation

Electromagnetic compatibility is regulated by international standards such as IEC 61000-4-x and CISPR 32. Although system-level performance depends on board design and layout, IL761xV and IL781xV parts incorporate embedded magnetic shielding to reduce radiated EMI and frequency hopping to reduce EMI peak amplitudes. This inherently low EMI eliminates the need for shielding or external mitigation components such as ferrite beads. The parts are fully EN 55032 CISPR 32 Class B compliant with no EMI mitigation components and only 12 pF of input-to-output stitching capacitance. The capacitance can be created in a four-layer PCB by extending the GND1 and GND2 ground planes into the PCB isolation area. External stitching capacitor components are generally not recommended due to parasitic inductance above one gigahertz. See Fig. 13 for a typical schematic, and [Application Bulletin AB-29](#) for a recommended PCB layout.

Power and Thermal Management

Note that self-heating generated by the quiescent current of the DC-to-DC convertor generally limits the ambient operating temperature to less than 125 °C to avoid exceeding the 150 °C Absolute Maximum junction temperature. The isolator section will operate at 125 °C, however, if the DC-to-DC convertor is not used or is duty cycled.

IL761xV and IL781xV parts typically operate well within the current limits of the DC-DC convertor unless the coupler is operating at high speed or there are external loads on the DC-DC convertor. Internal thermal management circuitry gradually limits the output voltage and power output as the junction temperature increases to avoid thermal overload. The coupler section is guaranteed to operate at the 2.7 volt minimum DC-DC convertor output voltage with 250 mW output power.

Board Thermal Optimization

Board layout can be optimized for thermal performance if necessary. A double-sided, double buried power plane ("2s2p") board maximizes thermal performance. Thermal vias should be used between the power plane and the board surfaces. All of the IC ground pins should be connected, with wide traces to help cool the leadframe.

Ideal for Medical Systems

Patient-applied parts electrically connected to the patient in body-floating medical systems generally require two means of patient protection (2 x MOPP). IL761xV and IL781xV parts meet the 2 x MOPP requirements of 4 kV_{RMS} isolation and true 8 mm creepage. 2 x MOPP AC/DC power supplies are difficult to find and expensive. An inexpensive 2 x MOPP power supply can supply the operator interface, while a 2 x MOPP compliant IL761xV or IL781xV DC-to-DC converter can power the patient-applied electronics. The power requirements of the patient-applied electronics are generally low and can be satisfied with the internal DC-to-DC converter. A typical circuit is shown in Figure 18.

Maintaining Creepage

Creepage distances are often critical in isolated circuits. In addition to meeting JEDEC standards, NVE isolator packages have unique creepage specifications. Standard pad libraries often extend under the package, compromising creepage and clearance. Similarly, ground planes, if used, should be spaced to avoid compromising clearance. Package drawings and recommended pad layouts are included in this datasheet.

Inherently Low EMI


IL761xV and IL781xV parts are designed for compliance with IEC 61000-6-3, IEC 61000-6-4, CISPR, and FCC Class B standards for emissions. The DC-DC convertor oscillator operates above 88 MHz, where emission limits are higher since there is less risk of interference with common commercial radio and television broadcasting.

Frequency-hopping technology dramatically reduces peak EMI, and synchronous rectification and PWM control are avoided, resulting in inherently low EMI.

This inherently low EMI allows CISPR and FCC compliance without shielding or external components such as ferrite beads. The parts are fully compliant with EN 55032 CISPR 32 Class B with just a small amount of stitching capacitance.

High Magnetic Immunity

These parts are fully compliant with IEC 61000-6-1 and IEC 61000-6-2 magnetic immunity standards. The coupler's Wheatstone bridge configuration and differential magnetic field signaling ensure excellent EM immunity. Immunity to external magnetic fields is even higher if the field direction is "end-to-end" (rather than to "pin-to-pin") as shown at right.



Typical Performance Graphs

The following graphs show typical performance:

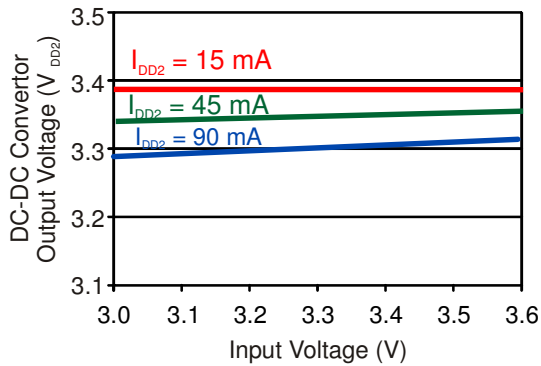


Figure 3. Typical DC-DC converter line regulation.

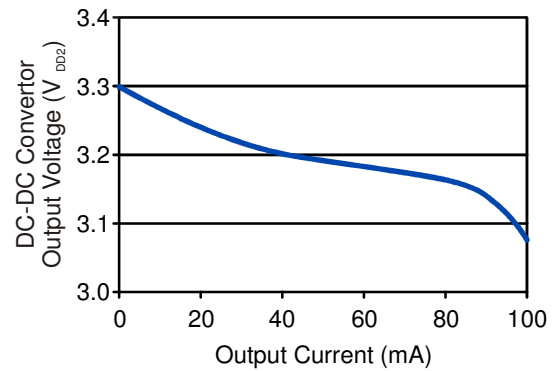


Figure 4. Typical DC-DC converter load regulation (IL76xx; $V_{DD1} = 3.3$ V).

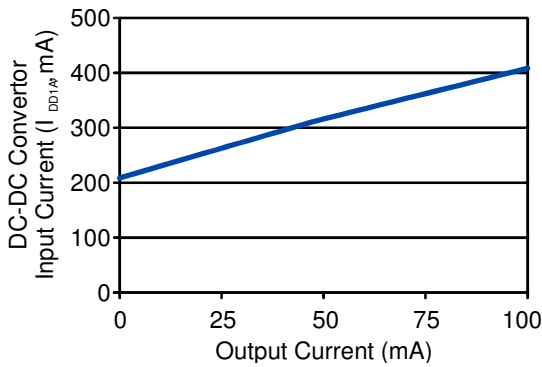


Figure 5. Typical DC-DC converter supply current versus output current ($V_{DD1} = 3.3$ V).

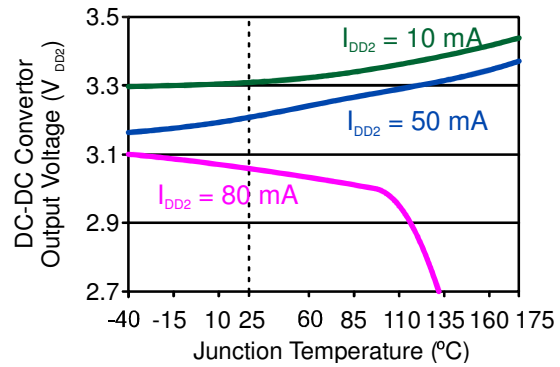


Figure 6. Typical DC-DC converter output versus temperature (IL76xx; $V_{DD1A} = 3.3$ V).

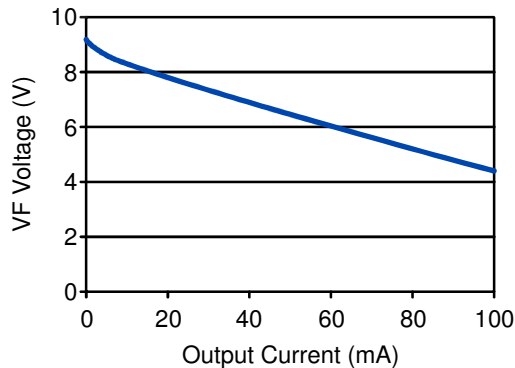


Figure 7. Typ. unregulated output vs. output current ($V_{DD1A} = 3.3$ V; 25°C).

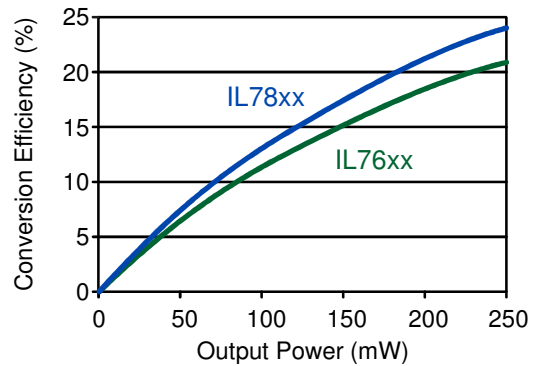


Figure 8. Typical DC-to-DC converter power efficiency ($V_{DD1A} = 3.3$ V; 25°C).

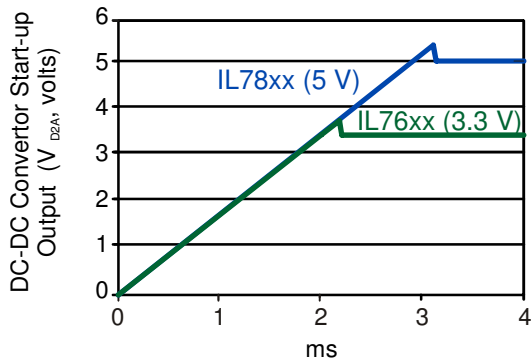


Figure 9. Typical DC-to-DC converter start-up voltage (no load).

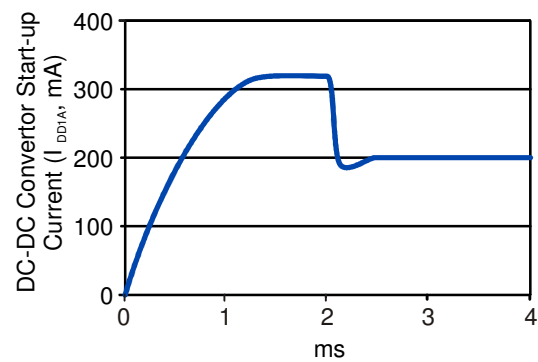


Figure 10. Typical DC-to-DC converter start-up current (no load).

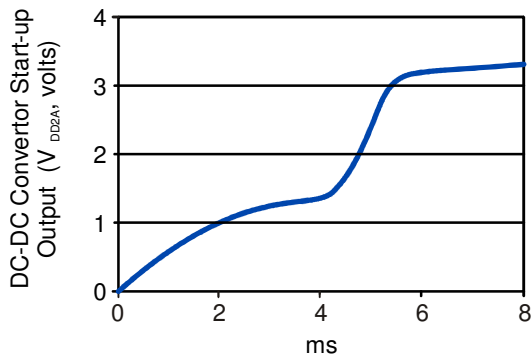


Figure 11. Typical DC-to-DC converter start-up voltage (IL76xx; maximum load).

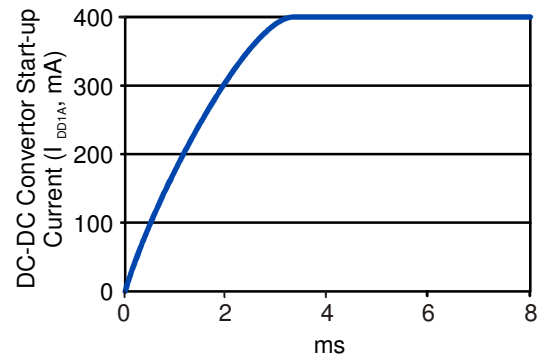


Figure 12. Typical DC-to-DC converter start-up current (maximum load).

Application Circuits

Basic recommended circuit:

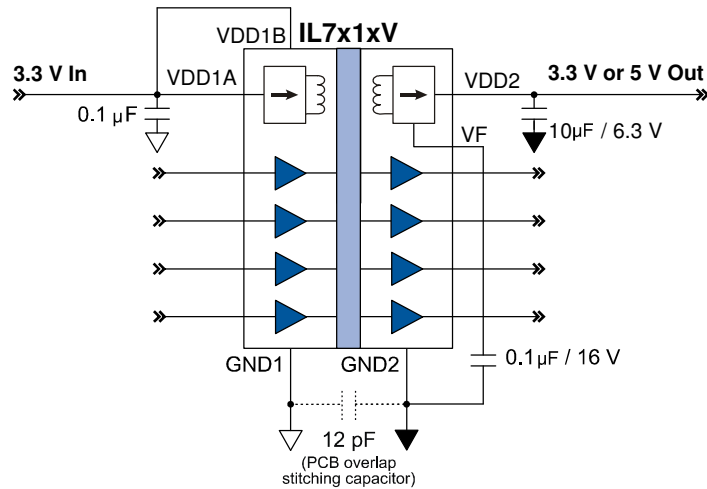


Figure 13. Typical IL7x1xV circuit.

Bypass capacitors are required on the VDD1, VDD2, and VF pins as shown. The small input-to-output ground stitching capacitance is recommended for EMI mitigation. It can be a discrete capacitor or created using PCB ground-plane overlap.

Isolated SPI interface to ADC:

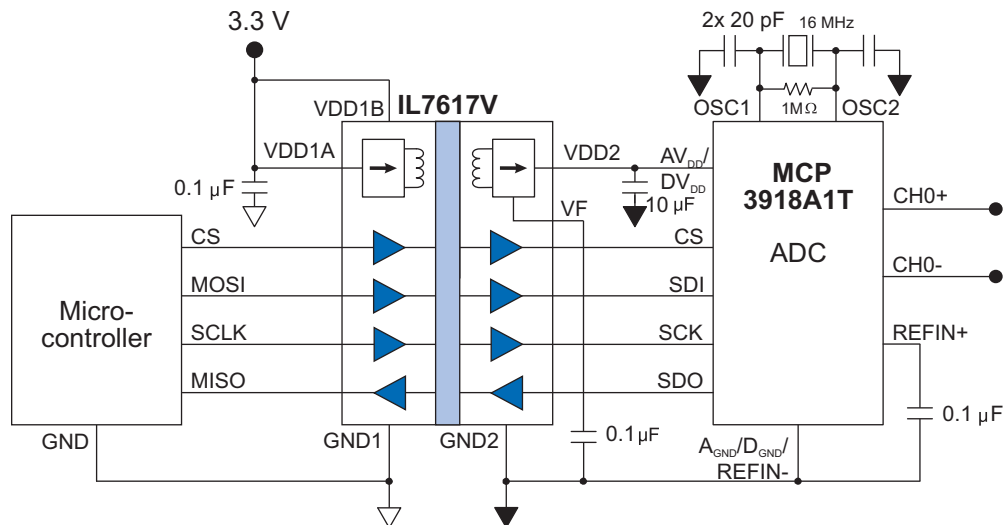


Figure 14. Isolated bidirectional SPI ADC interface.

The IL7617V provides three transmit and one receive channel, making it ideal for isolating ubiquitous bidirectional SPI peripherals such as ADCs. The isolation allows safe connections to line voltage, and the isolated power supply prevents microcontroller noise from affecting the ADC.

Isolated SPI sensor interface:

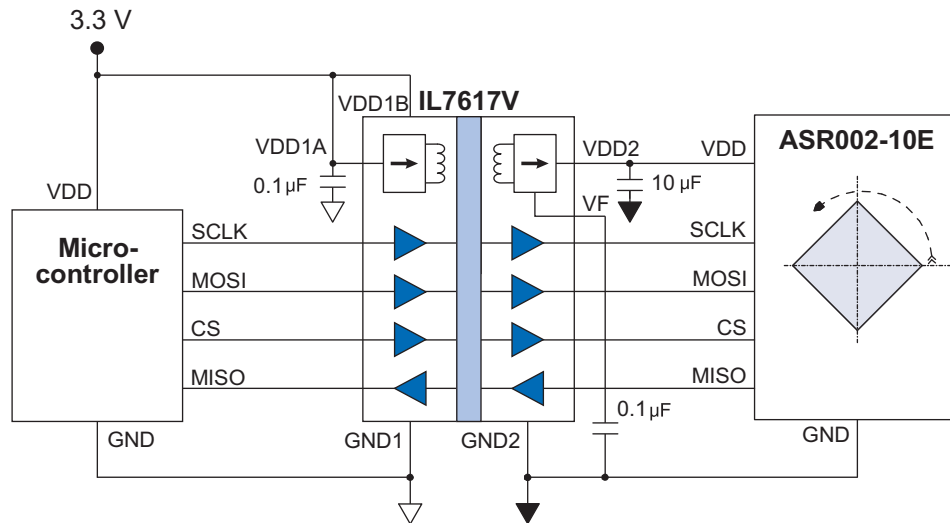


Figure 15. Isolated SPI sensor interface.

The IL7617VE provides three transmit and one receive channel, making it ideal for isolating classic SPI sensors. The isolated power supply prevents noise from the microcontroller from affecting the sensor.

Isolated SPI / MICROWIRE interface to transmit-only ADC:

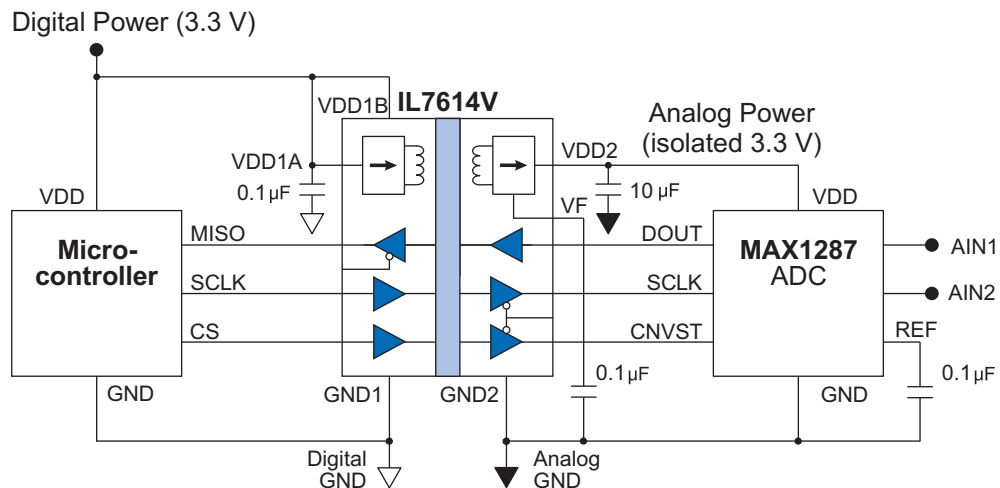


Figure 16. Isolated ADC serial interface.

Only three channels of isolation are required for transmit-only SPI peripherals such as ADCs or sensors. The IL7614V provides an isolated analog power supply to significantly improve the noise performance of a successive-approximation ADC, and also isolates the serial interface.

Isolated shunt-based electric meter interface:

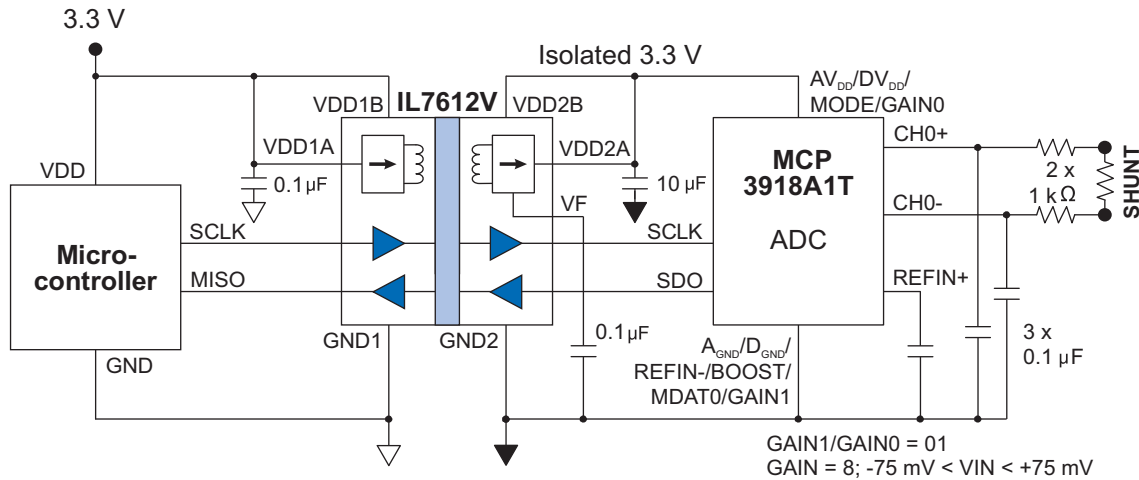


Figure 17. Isolated shunt-based current sensing.

Just two channels are needed to isolate unidirectional SPI-type interfaces that do not have chip-selects or other interface lines. The circuit above takes advantage of the “two-wire interface mode” of an MCP3918 ADC. The IL7612V also supplies ADC power for shunt-based current sensing in the circuit above for power measurement systems such as electric meters. Unlike most optocouplers, the IL7612V isolator section is fast enough for the ADC’s 20 MHz high-speed SPI.

Isolated SPI for receive-only DACs:

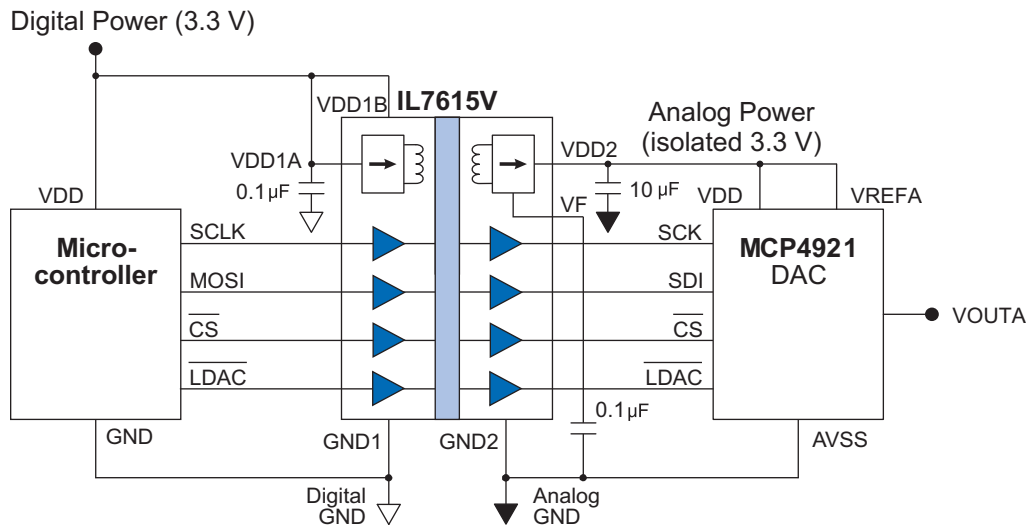


Figure 18. Isolated four-channel DAC interface.

The IL7615V provides four transmit channels of isolation for receive-only DACs with SPI plus additional lines. In the example above, the LDAC synchronization line is isolated, which transfers data from the serial interface latches to the output latches, as well as the SPI lines (SCLK, MOSI, and CS).

Double-isolated asynchronous parallel DAC interface:

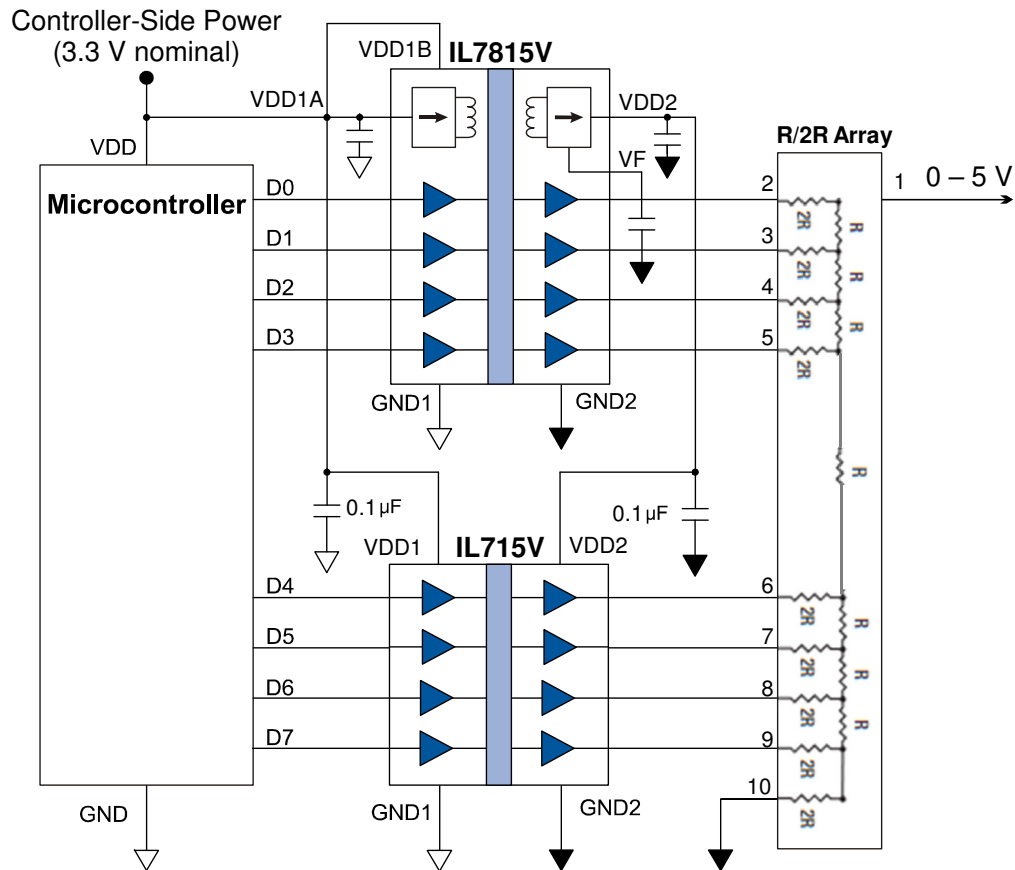


Figure 19. Double-isolated asynchronous parallel DAC interface.

The IL7615V plus an IL715V provide isolated power and a full byte of isolation. Since the IL7815V and IL715V have rail-to-rail outputs and the IL7815V's integrated DC-to-DC converter has extremely low output ripple, an inexpensive R/2R network can be used as a DAC.

Controller-Side Power (3.3 V nominal)

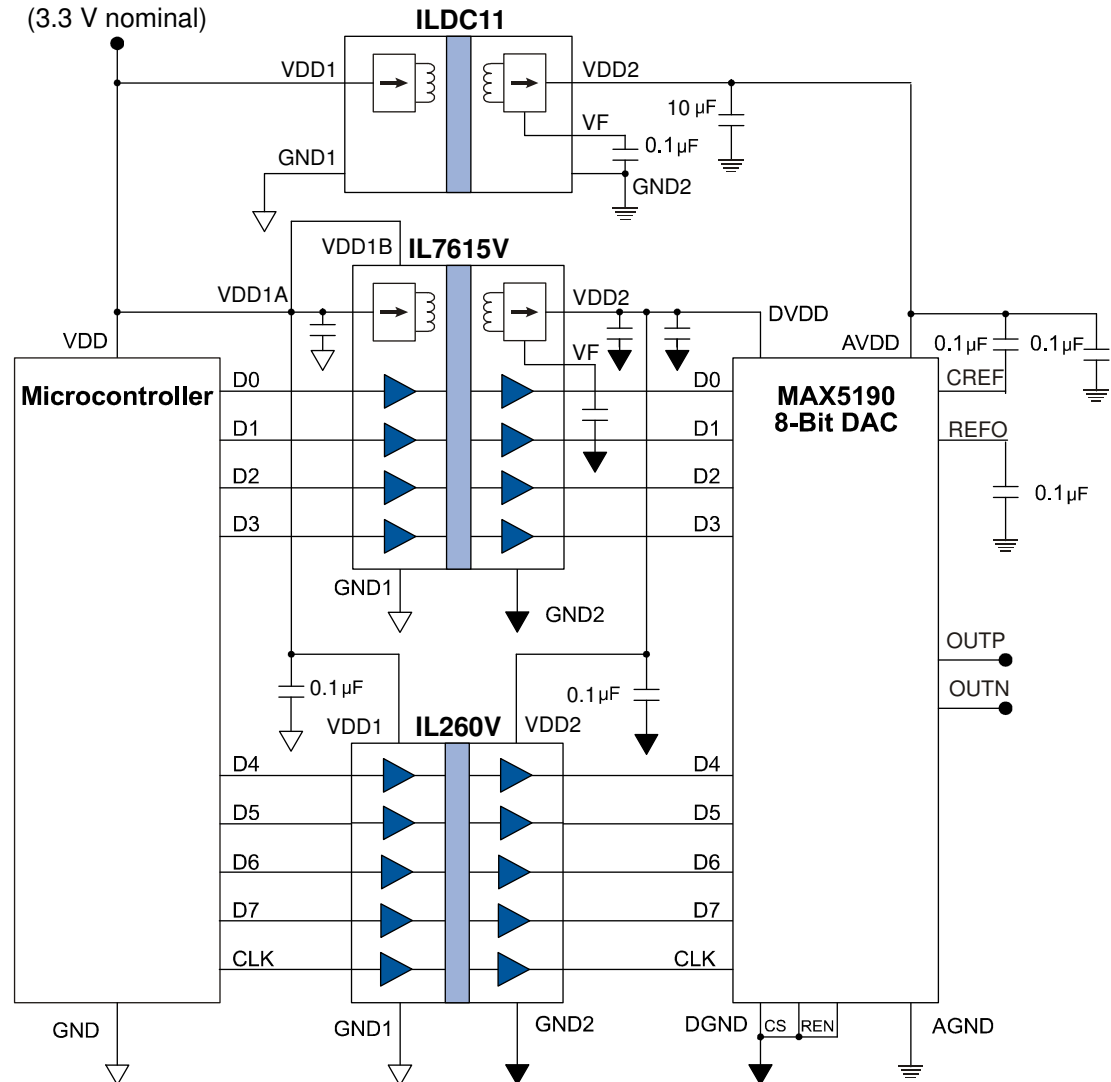


Figure 20. Double-isolated parallel DAC interface.

The IL7615V plus an IL260V provide isolated digital power and nine channels of isolation. This allows isolation of an eight-bit parallel peripheral such as a high-speed digital-to-analog convertor. The 110 Mbps speed of the IL7615V and IL260V couplers support the 40 MHz DAC used in this circuit. A separate ILDC11 DC-DC convertor provides an isolated analog power supply to improve noise performance by preventing digital noise from affecting the analog section of the DAC. The ILDC11's extremely low ripple also enhances the DAC's noise performance.

Controller-Side Power
(3.3 V nom.)



An IL7615VE plus an IL717VE provide isolated power and eight channels of isolation with just two ICs. This circuit allows isolation of five SPI peripherals such as NVE Smart Sensors.

Medical System Isolation:

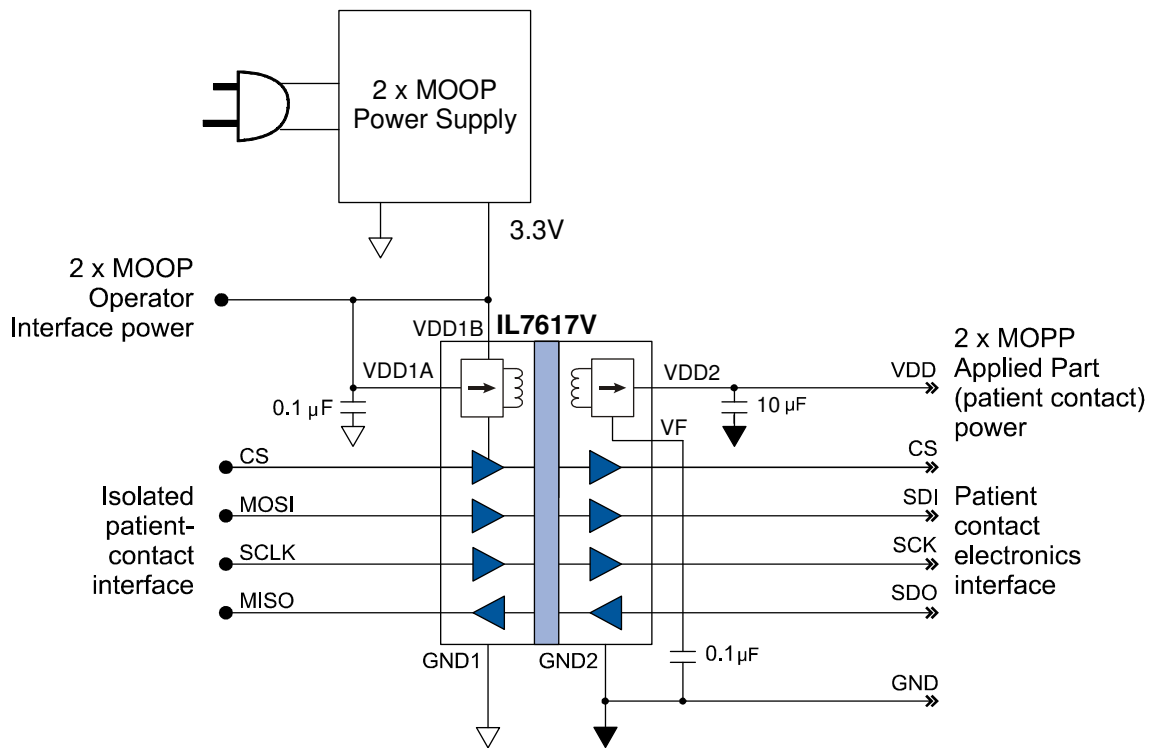


Figure 22. Medical system isolation.

Combining a double Means of Operator Protection (2 x MOOP) power supply with a double Means of Patient Protection (2 x MOPP) IL761xV or IL781xV provides cost-effective compliance with IEC 60601 for body-floating medical systems. The power requirements of the patient-applied electronics are generally low and can be satisfied with the IL761xV / IL781xV DC-to-DC convertor. The data coupler section can transfer data between the operator interface electronics and the patient-contact electronics (via SPI in the example above).

16 mm Creepage:

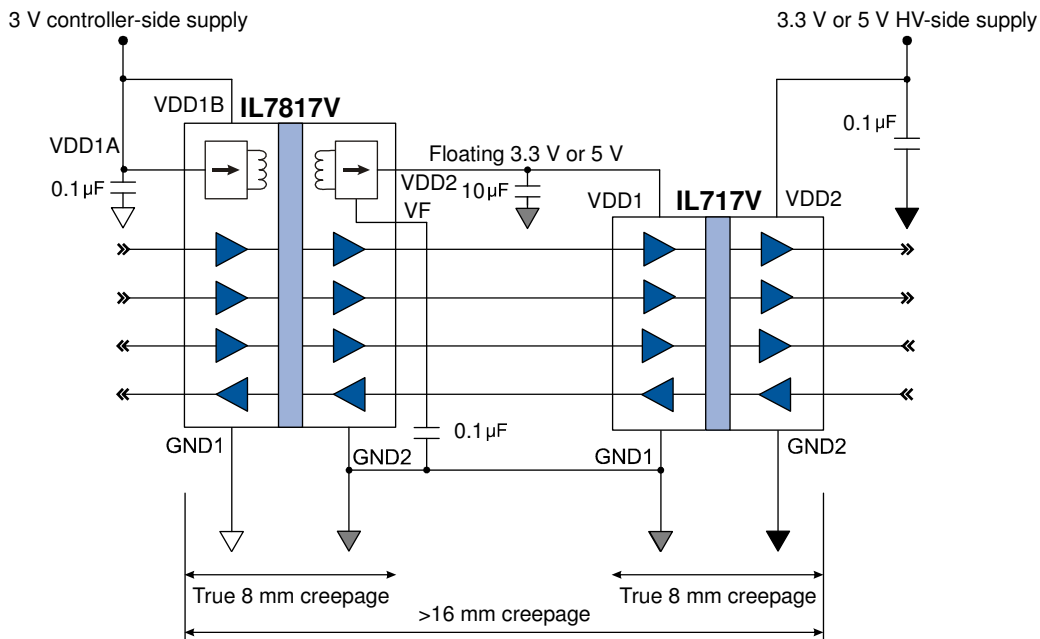


Figure 23. 16 mm creepage with two isolators.

Combining two guaranteed eight-millimeter creepage packages in series provides more than 16 millimeter creepage in a small, convenient form factor. This meets the requirements for 500 V_{RMS} working voltage under IEC 60601.

5-volt to 3.3-volt isolation:


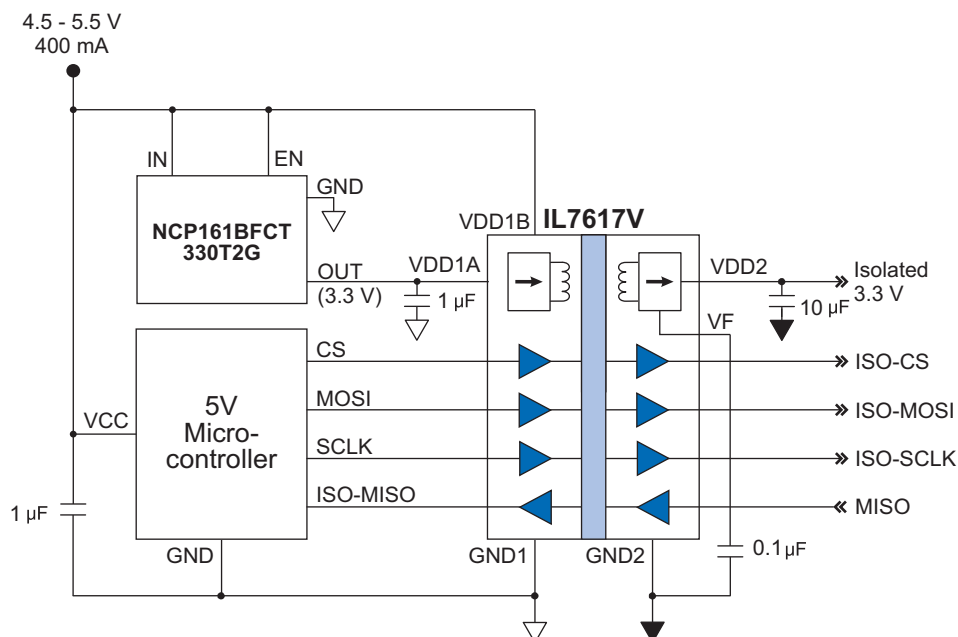



Figure 24. 5-volt to 3.3-volt isolation.

An inexpensive external regulator can be used to accommodate a five-volt input to the DC-DC convertor. For higher efficiency, a buck switching regulator such as a LM3691-3.3 can be used.

Package Drawing

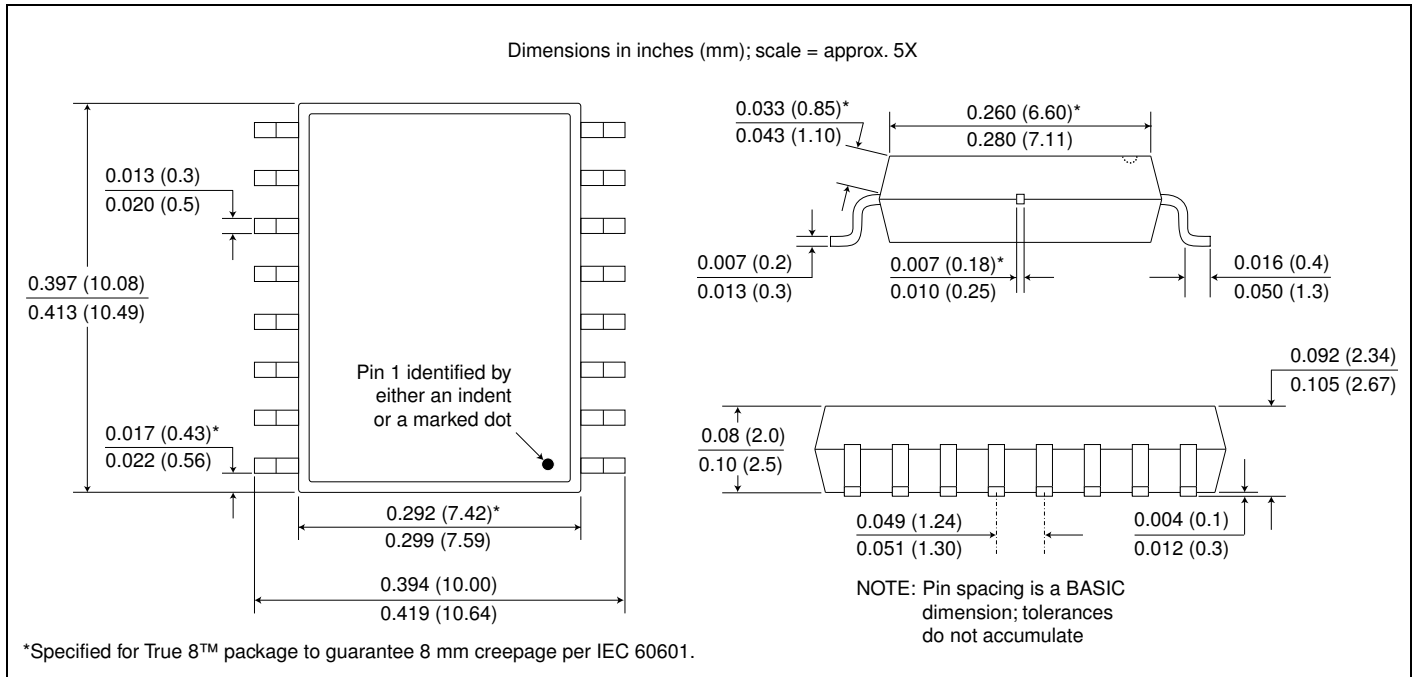

Recommended Pad Layout

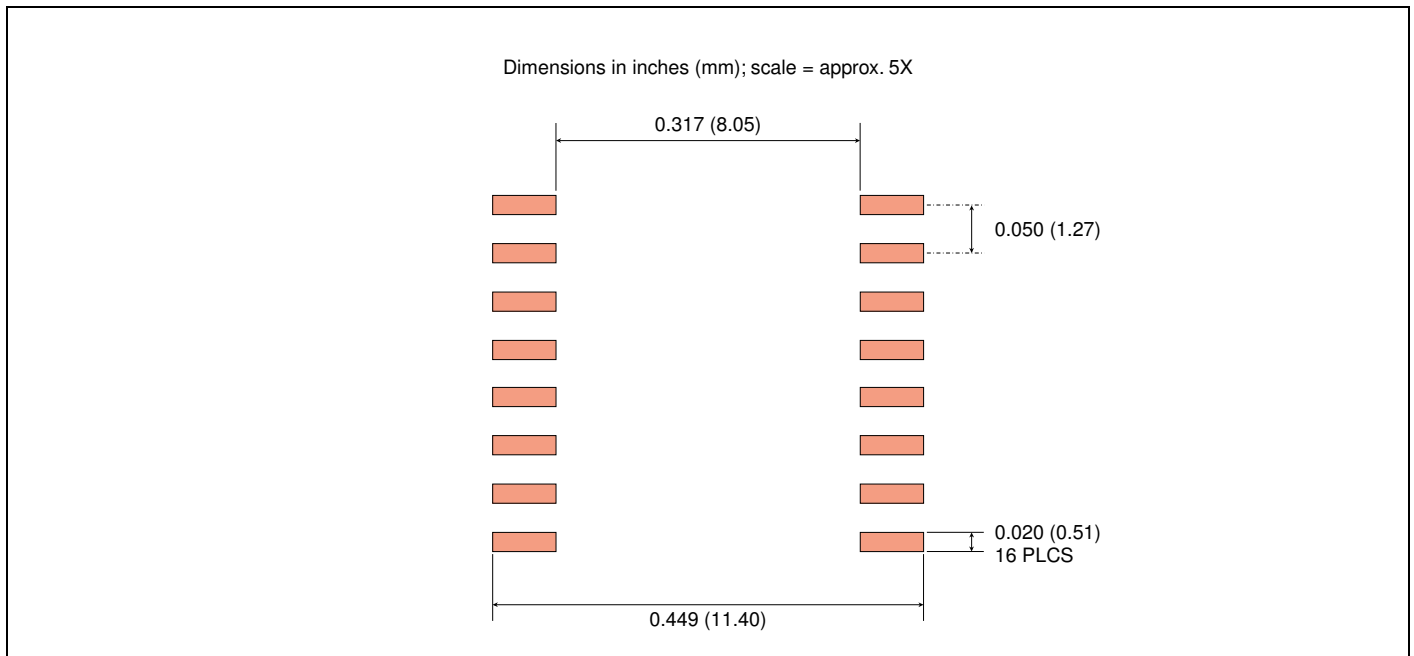

Available Part Numbers (IL761xV)

Part Number	Bus Voltage	Channels (transmit/receive)	Bulk Packaging	RoHS?
IL7611VE	3.3 V	2 / 0	Tubes (50 pcs.)	RoHS
IL7612VE		1 / 1		
IL7614VE		2 / 1		
IL7615VE		4 / 0		
IL7616VE		2 / 2		
IL7617VE		3 / 1		
IL7611VE-TR7		2 / 0	7-inch reels (up to 450 pcs.)	
IL7612VE-TR7		1 / 1		
IL7614VE-TR7		2 / 1		
IL7615VE-TR7		4 / 0		
IL7616VE-TR7		2 / 2		
IL7617VE-TR7		3 / 1		
IL7612VE-TR13		1 / 1	13-inch reels (up to 1500 pcs.)	
IL7614VE-TR13		2 / 1		
IL7614VE-TR13		2 / 1		
IL7615VE-TR13		4 / 0		
IL7616VE-TR13		2 / 2		
IL7617VE-TR13		3 / 1		
IL7611V		2 / 0	Tubes (50 pcs.)	SnPb finish (non-RoHS; Special Order)
IL7612V		1 / 1		
IL7614V		2 / 1		
IL7615V		4 / 0		
IL7616V		2 / 2		
IL7617V		3 / 1		
IL7611V-TR7	2 / 0	7-inch reels (up to 450 pcs.)		
IL7612V-TR7	1 / 1			
IL7614V-TR7	2 / 1			
IL7615V-TR7	4 / 0			
IL7616V-TR7	2 / 2			
IL7617V-TR7	3 / 1			
IL7611V-TR13	2 / 0	13-inch reels (up to 1500 pcs.)		
IL7612V-TR13	1 / 1			
IL7614V-TR13	2 / 1			
IL7615V-TR13	4 / 0			
IL7616V-TR13	2 / 2			
IL7617V-TR13	3 / 1			

Available Part Numbers (IL781xVE)

Part Number	Bus Voltage	Channels (transmit/receive)	Bulk Packaging	RoHS?
IL7811VE	5 V	2 / 0	Tubes (50 pcs.)	RoHS
IL7812VE		1 / 1		
IL7814VE		2 / 1		
IL7815VE		4 / 0		
IL7816VE		2 / 2		
IL7817VE		3 / 1		
IL7811VE-TR7		2 / 0	7-inch reels (up to 450 pcs.)	
IL7812VE-TR7		1 / 1		
IL7814VE-TR7		2 / 1		
IL7815VE-TR7		4 / 0		
IL7816VE-TR7		2 / 2		
IL7817VE-TR7		3 / 1		
IL7812VE-TR13		1 / 1	13-inch reels (up to 1500 pcs.)	
IL7814VE-TR13		2 / 1		
IL7814VE-TR13		2 / 1		
IL7815VE-TR13		4 / 0		
IL7816VE-TR13		2 / 2		
IL7817VE-TR13		3 / 1		
IL7811V		2 / 0	Tubes (50 pcs.)	SnPb finish (non-RoHS; Special Order)
IL7812V		1 / 1		
IL7814V		2 / 1		
IL7815V		4 / 0		
IL7816V		2 / 2		
IL7817V		3 / 1		
IL7811V-TR7	2 / 0	7-inch reels (up to 450 pcs.)		
IL7812V-TR7	1 / 1			
IL7814V-TR7	2 / 1			
IL7815V-TR7	4 / 0			
IL7816V-TR7	2 / 2			
IL7817V-TR7	3 / 1			
IL7811V-TR13	2 / 0	13-inch reels (up to 1500 pcs.)		
IL7812V-TR13	1 / 1			
IL7814V-TR13	2 / 1			
IL7815V-TR13	4 / 0			
IL7816V-TR13	2 / 2			
IL7817V-TR13	3 / 1			

Revision History

ISB-DS-001-IL761xV-IL781xV-Rev. E
Feb. 2024

Change

- Added asynchronous parallel application circuit (Fig. 19, p. 18) and 16 mm creepage (Fig. 23, p. 22).

ISB-DS-001-IL761xV-IL781xV-Rev. D
Sept. 2023

Change

- Added CISPR 32 Class B compliance and stitching capacitor recommendation (p. 11).
- Added basic application circuit (Fig. 13, p. 15).

ISB-DS-001-IL761xV-IL781xV-Rev. C
October 2022

Changes

- Added and IL781xV-Series (3.3-to-5 V DC-to-DC convertors).
- Eliminated startup current specification with soft-start on lots 22xxxx and higher (p. 2).
- Added IEC 60601 medical equipment standards (p. 3).
- Added equipment-level safety standards such as IEC 62368-1 (p. 3).
- Upgraded to VDE 0884-17 certification (p. 9).
- Changed isolation and working voltages under the more stringent standard (p. 9).
- Added section on EMI mitigation (p. 11).
- Added section on medical systems (p. 11).
- Replaced DC-to-DC convertor “Start-up Current” paragraph with soft start-up description.
- Changed typical performance graphs with addition of soft-start (Figs. 9 – 12).
- Changed isolation and working voltages under the more stringent standard (p. 9).
- Added diagram for medical system isolation (Fig. 20).

ISB-DS-001-IL76xx-Rev. B
September 2021

Changes

- Corrected IL7616V (p. 5) and IL7617V (p. 6) pin-out diagrams.
- Changed isolation voltage to 4 kV under the more stringent IEC60747-17 standard.

ISB-DS-001-IL76xx-Rev. A
April 2021

Changes

- Added IL7611V and IL7612V.
- Changed Absolute Maximum storage and junction temperatures to 150 °C.
- Added VF vs. output current typical performance graph.
- Added descriptions of external regulator options.
- Added IL7617V / ADC application circuit (Figure 11).
- Added IL7612V / ADC application circuit (Figure 14).
- Added IL7615V / DAC application circuit (Figure 15).

ISB-DS-001-IL76xx-PRELIM3
August 2020

Changes

- Added thermal shutdown protection (p. 9) and graph (Figure 6).
- Added start-up current specification (p. 6) and typical graph (Figure 9).

ISB-DS-001-IL76xx-PRELIM2
July 2020

Change

- Added IL7616 and IL7617.

ISB-DS-001-IL76xx-PRELIM
July 2020

Change

- Preliminary release.

Datasheet Limitations

The information and data provided in datasheets shall define the specification of the product as agreed between NVE and its customer, unless NVE and customer have explicitly agreed otherwise in writing. All specifications are based on NVE test protocols. In no event however, shall an agreement be valid in which the NVE product is deemed to offer functions and qualities beyond those described in the datasheet.

Limited Warranty and Liability

Information in this document is believed to be accurate and reliable. However, NVE does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NVE be liable for any indirect, incidental, punitive, special or consequential damages (including, without limitation, lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Right to Make Changes

NVE reserves the right to make changes to information published in this document including, without limitation, specifications and product descriptions at any time and without notice. This document supersedes and replaces all information supplied prior to its publication.

Use in Life-Critical or Safety-Critical Applications

Unless NVE and a customer explicitly agree otherwise in writing, NVE products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical devices or equipment. NVE accepts no liability for inclusion or use of NVE products in such applications and such inclusion or use is at the customer's own risk. Should the customer use NVE products for such application whether authorized by NVE or not, the customer shall indemnify and hold NVE harmless against all claims and damages.

Applications

Applications described in this datasheet are illustrative only. NVE makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NVE products, and NVE accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NVE product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customers. Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NVE does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customers. The customer is responsible for all necessary testing for the customer's applications and products using NVE products in order to avoid a default of the applications and the products or of the application or use by customer's third party customers. NVE accepts no liability in this respect.

Limiting Values

Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the recommended operating conditions of the datasheet is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and Conditions of Sale

In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NVE hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NVE products by customer.

No Offer to Sell or License

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export Control

This document as well as the items described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Automotive Qualified Products

Unless the datasheet expressly states that a specific NVE product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NVE accepts no liability for inclusion or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NVE's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NVE's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NVE for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NVE's standard warranty and NVE's product specifications.

An ISO 9001 Certified Company

NVE Corporation
11409 Valley View Road
Eden Prairie, MN 55344-3617 USA
Telephone: (952) 829-9217
www.nve.com
e-mail: iso-info@nve.com

©NVE Corporation
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

ISB-DS-001-IL761xV-IL781xV-Rev. E

February 2024