



BDK991 High-Field, 3-Volt Low-Power Omni-Directional Medical Grade TMR Switch



Functional Diagram

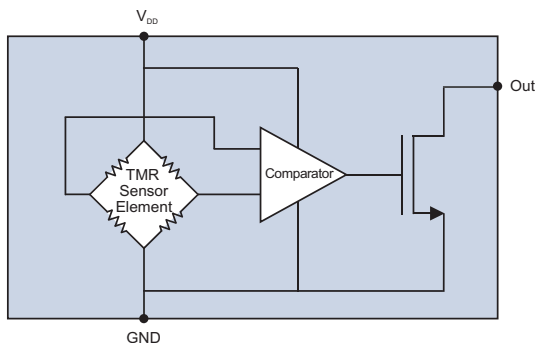

Features

- Detection of large magnetic fields
- 320 mT operate point
- Unlimited maximum field
- 2.4 V to 4.2 V operating voltage for single-cell operation
- 2.8 μ A typical quiescent current
- Continuous operation for low noise and high-speed
- 1.1 x 1.1 mm DFN or 0.65 x 0.65 mm WLCSP
- Omni-directional field sensitivity

Applications

- Primary lithium or rechargeable lithium-ion powered devices
- MRI field detection
- Portable instruments

Description

The BDK991 is a digital switch for detecting large magnetic fields. They can withstand unlimited fields up to nine tesla without being damaged or turning off.


The part uses novel tunneling magnetoresistance (TMR) technology to provide both the lowest quiescent current available in a continuous-duty solid state magnetic switch and large field detection. The sensor also provides unmatched miniaturization. The parts are available in NVE's ultraminiature 1.1 mm x 1.1 mm DFN leadless package or as 0.65 x 0.65 mm wafer level chip-scale package.

The output is configured as a magnetic "switch" where the output turns on when the magnetic field is applied, and turns off when the field is removed. The applied field can be of either magnetic polarity and in any direction, and the operate point is extremely stable over supply voltage and temperature. The output is current-sinking, and can sink up to 100 microamps.

The product consists of a TMR sensor element and CMOS signal processing circuitry to convert the analog sensor element output to a digital output.

Custom magnetic operating thresholds can be provided.

Idealized Magnetic Response



Absolute Maximum Ratings

Parameter	Min.	Max.	Units
Supply voltage		5.5	Volts
Output voltage		5.5	Volts
Output current		200	μA
Storage temperature	-65	150	°C
Junction temperature		150	°C
Applied magnetic field		Unlimited	

Operating Specifications

T _{min} to T _{max} ; 2.4 V < V _{DD} < 4.2 V unless otherwise stated.						
Parameter	Symbol	Min.	Typ.	Max.	Units	Test Condition
Supply voltage	V _{DD}	2.4	3	4.2	Volts	
Operating temperature	T _{MIN} ; T _{MAX}	-40		85	°C	
Magnetic operate point	H _{OP}	200	320	400	mT	25°C
		200	320	470		
Operate point temperature coefficient	ΔH _{OP} / ΔT		0.4		%/°C	-40°C to 85°C Fields in-plane
Operate point angle coefficient	ΔH _{OP} / Δ∠		1.1		%/°	
Magnetic release point	H _{REL}	100			mT	
Hysteresis	H _{DIF}	10	50		mT	
Quiescent current	I _{DDQ}		1.5		μA	V _{DD} = 2.4 V
		2	2.8	4		V _{DD} = 3.3 V
			3.3			V _{DD} = 3.6 V
			4.2			V _{DD} = 4.2 V
Output drive current	I _{OL-ON}	100			μA	
Output low voltage	V _{OL}			0.3	V	V _{DD} = 3V; I _{OL-ON} = 100 μA
Output leakage current	I _{OL-OFF}		0.095	0.5	μA	
Maximum switching frequency	f		20		kHz	

Notes:

- ESD per Human Body Model (HBM), JESD22-A114.

Typical Performance

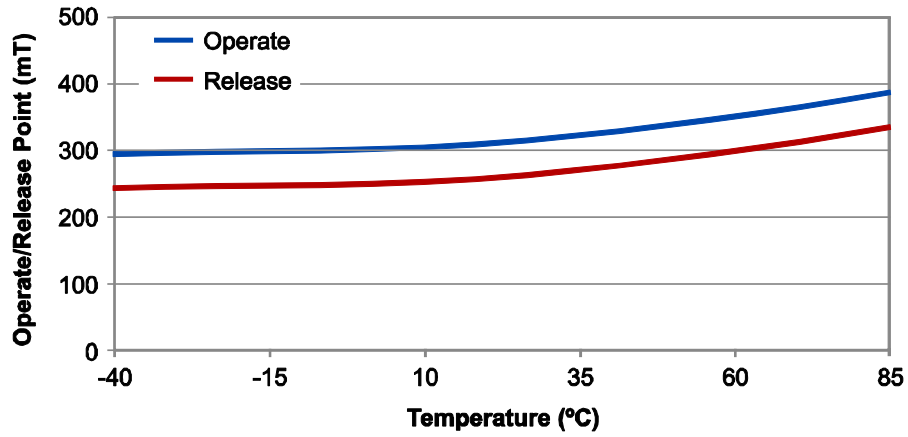


Figure 1. Magnetic operate point vs. temperature.

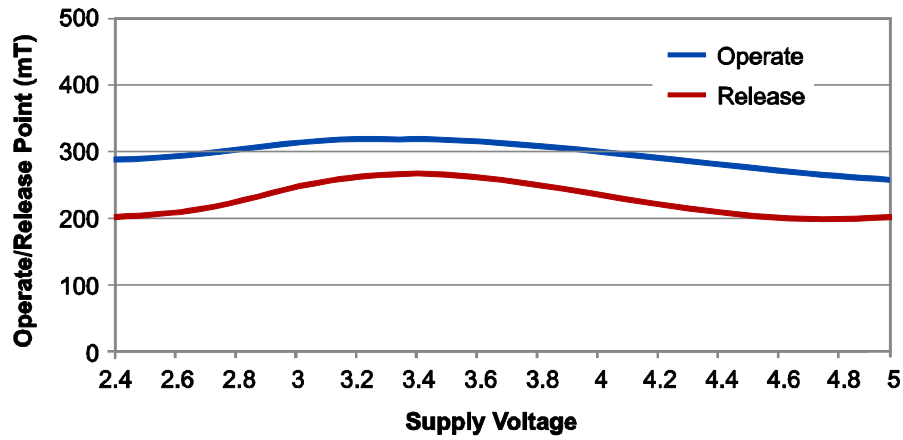


Figure 2. Magnetic operate point vs. supply voltage.

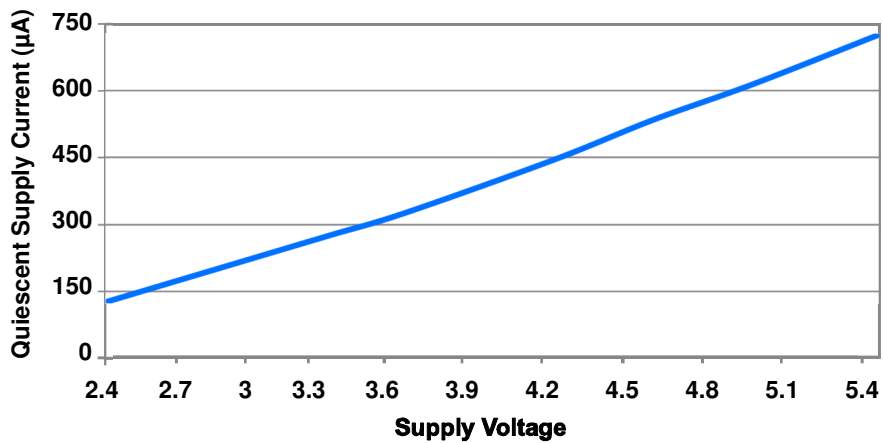


Figure 3. Quiescent supply current vs. supply voltage.

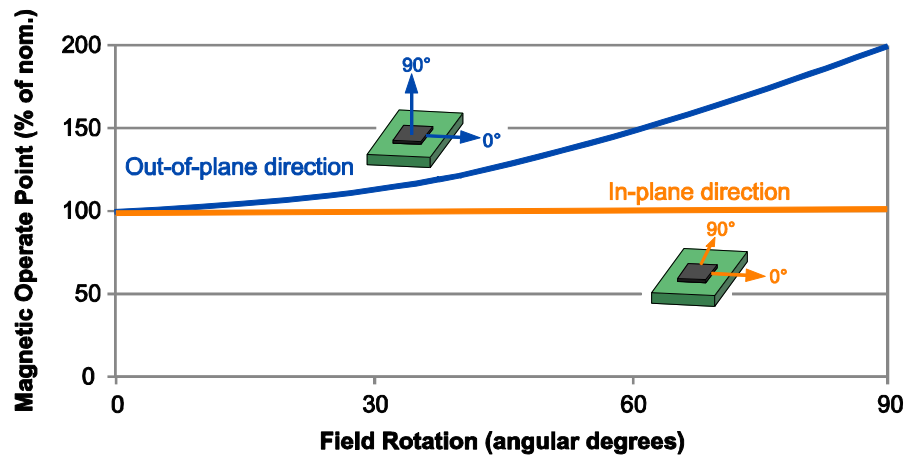


Figure 4. Magnetic operate point vs. field orientation.

Application Information

Rigorous Testing

All parts are 100% tested for electrical and magnetic parameters. To ensure quality and reliability in medical applications, BDK991 parts are preconditioned and tested as follows:

- 100% of the parts receive a 24-hour bake at 150°C prior to final test.
- 100% visual inspection of the parts in the tape after final test.
- Lot qualification test where 200 parts that have passed final test from each production lot are exposed to two thermal cycles using a standard solder reflow profile, then re-tested for correct operation. All parts must pass for the parts to be accepted into inventory.

Omni-Directional Sensitivity

As the magnetic field intensity varies, the BDK991's digital output will turn on and off. Unlike single-axis switches like Hall effect or other sensors, the BDK991 sensor is sensitive to magnetic fields in any direction, so multiple sensors are not needed for orthogonal or unknown directions of applied fields. The magnetic operate and release points are virtually unaffected by the angle of magnetic field in the plane of the sensor, and increase but remain sensitive for magnetic fields out of the plane of the sensor. The diagrams below show three permanent magnet orientations that will activate the sensor:

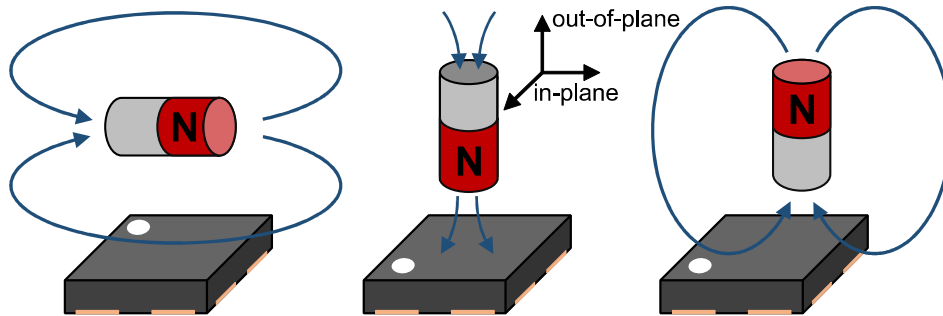


Figure 5. The BDK991's omni-directional sensitivity.

The omni-directional nature of the sensor also makes the sensitivity omnipolar. Either magnetic polarity activates the sensor.

External Pull-Up Resistor

The output is a logic low when the sensor is activated. The output is open-drain should have an external pull-up resistor. For microcontroller interfaces, the microcontroller's input pull-up resistors can be activated.

External Duty Cycling

The BDK991 can be externally duty-cycled. Unlike other types of sensors, the switching hysteresis is provided by the magnet sensor element, not a comparator, so the proper hysteresis state is retained when the part is duty-cycled:

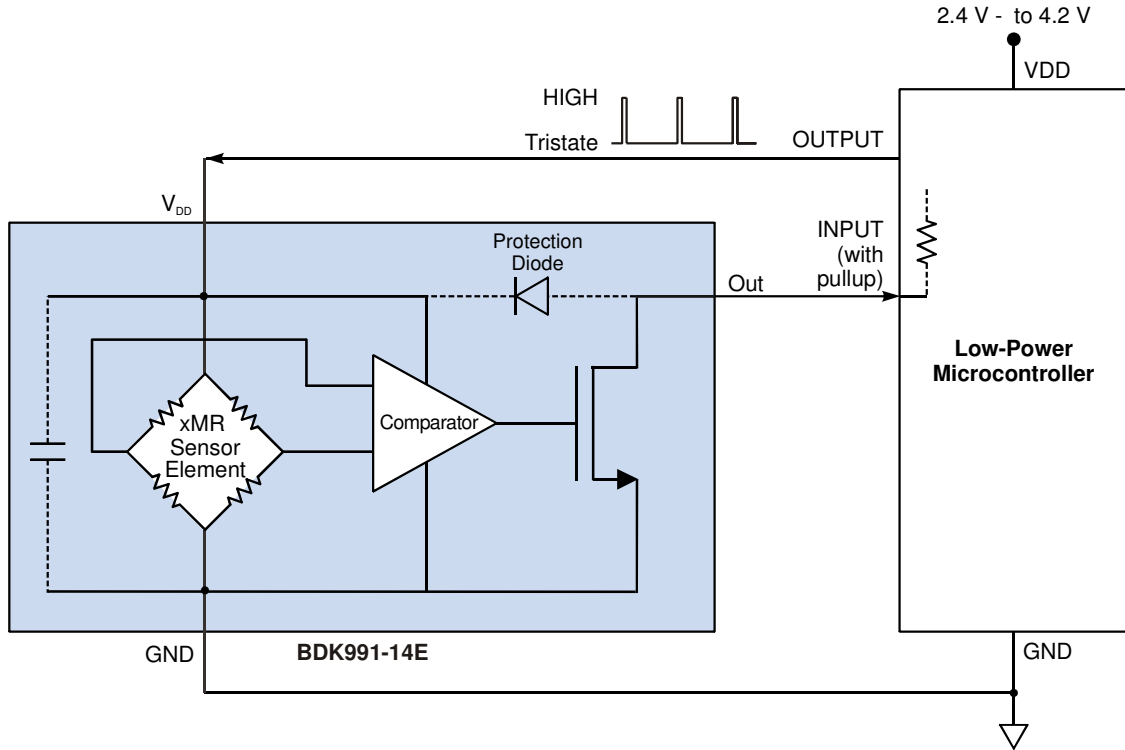


Figure 6. External duty cycling using a microcontroller.

Note that there is a protection diode from the output to V_{DD}, so that if V_{DD} is grounded the sensor output will be low (approximately 0.6 volts), and the pullup resistor will draw current. Therefore, the most efficient way to duty cycle the sensor is to have an output driving V_{DD} to activate the part, and tri-state (rather than grounding) to deactivate the part.

Revision History

SB-00-179

December 2025

Change

- Initial release.

Datasheet Limitations

The information and data provided in datasheets shall define the specification of the product as agreed between NVE and its customer, unless NVE and customer have explicitly agreed otherwise in writing. All specifications are based on NVE test protocols. In no event however, shall an agreement be valid in which the NVE product is deemed to offer functions and qualities beyond those described in the datasheet.

Limited Warranty and Liability

Information in this document is believed to be accurate and reliable. However, NVE does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NVE be liable for any indirect, incidental, punitive, special or consequential damages (including, without limitation, lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Right to Make Changes

NVE reserves the right to make changes to information published in this document including, without limitation, specifications and product descriptions at any time and without notice. This document supersedes and replaces all information supplied prior to its publication.

Use in Life-Critical or Safety-Critical Applications

Unless NVE and a customer explicitly agree otherwise in writing, NVE products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical devices or equipment. NVE accepts no liability for inclusion or use of NVE products in such applications and such inclusion or use is at the customer's own risk. Should the customer use NVE products for such application whether authorized by NVE or not, the customer shall indemnify and hold NVE harmless against all claims and damages.

Applications

Applications described in this datasheet are illustrative only. NVE makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NVE products, and NVE accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NVE product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customers. Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NVE does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customers. The customer is responsible for all necessary testing for the customer's applications and products using NVE products in order to avoid a default of the applications and the products or of the application or use by customer's third party customers. NVE accepts no liability in this respect.

Limiting Values

Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the recommended operating conditions of the datasheet is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and Conditions of Sale

In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NVE hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NVE products by customer.

No Offer to Sell or License

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export Control

This document as well as the items described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Automotive Qualified Products

Unless the datasheet expressly states that a specific NVE product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NVE accepts no liability for inclusion or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NVE's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NVE's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NVE for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NVE's standard warranty and NVE's product specifications.

An ISO 9001 Certified Company

NVE Corporation
11409 Valley View Road
Eden Prairie, MN 55344-3617 USA
Telephone: (952) 829-9217

www.nve.com

e-mail: sensor-info@nve.com

©NVE Corporation

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

SB-00-179

December 2025