
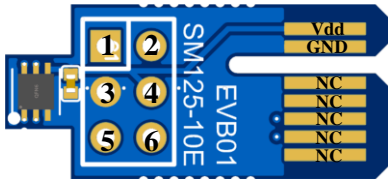


# SM125-10E-EVB01

## NVELink

Approximate Dimensions:  
21.3 x 9.8 x 1.6 mm

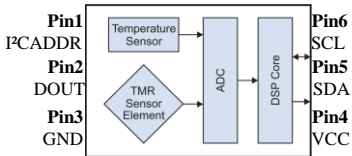

Card-Edge	NC
Connections	GND
← Front	SDA
Back →	SCL
1.0 mm pitch	I <sup>2</sup> CADDR
	DOUT
	NC



## **SM125-10E GMR Magnetometer**

- Programmable digital switch output
- Omnipolar 0 to 4 mT linear range; 8 bit
- I<sup>2</sup>C; 12.5 kSps update rate
- 125 °C operating temperature

[sensor-apps@nve.com](mailto:sensor-apps@nve.com)

[nve.com](http://nve.com)

+1 952 829 9217

**GMR Sensors**  
*Manufactured in  
Eden Prairie,  
Minnesota, USA*



*Download the  
product datasheet* →

