


SM223-10E-EVB02


NVELink

Approximate Dimensions:

22.1 x 9.8 x 1.6 mm

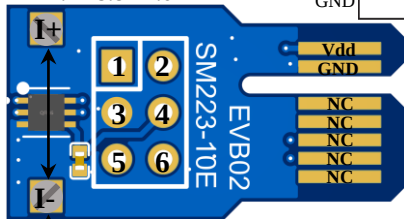

$\uparrow \sim 0.1 \text{ mT/A}; I \leq 7 \text{ A}; V_{\text{ISO}} > 100 \text{ V}$

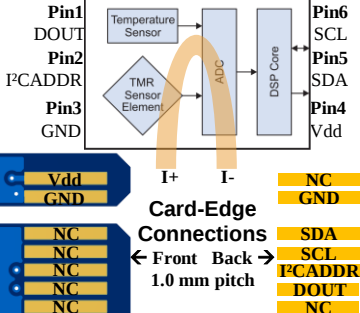



SM223-10E TMR Current Sensor

- Factory calibrated
- Bipolar ± 1.5 mT linear range; 10 bit
- I²C; 12.5 kSps update rate
- 125 °C operating temperature

sensor-apps@nve.com

nve.com

+1 952 829 9217

TMR Sensors
Manufactured in
Eden Prairie,
Minnesota, USA



***Download the
product datasheet→***

