



ADT001-10E TMR Rotary Sensor


- 3 to 20 mT operating magnetic field
- Precise digital quadrant outputs
- 2.5 x 2.5 x 0.8 mm package
- 2.4 to 5.5 V; 2 μ A typical current

sensor-apps@nve.com

nve.com

+1 952 829 9217

TMR Sensors
*Manufactured in
Eden Prairie,
Minnesota, USA*

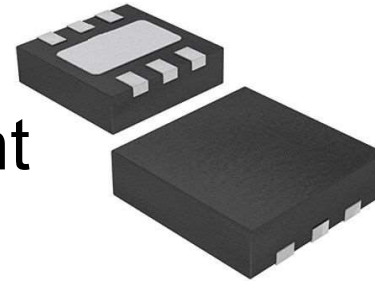

*Download the
product datasheet:*



ADT001-10E-EVB01

NVELink

Approximate Dimensions:
21.3 x 9.8 x 1.6 mm

